


## abba Cruiser Sky Lift Cradle Supplementary Instructions

### Assembly:

Please refer to the “Sky Lift Assembly & Operating Instructions” hand book to assemble the lift. The only revision to the hand book (covering the swing arm pivot attachment) is that the “Flat Base Attachment” should be fitted to the roller guide assembly instead, using the M14 bolt supplied. See below.....

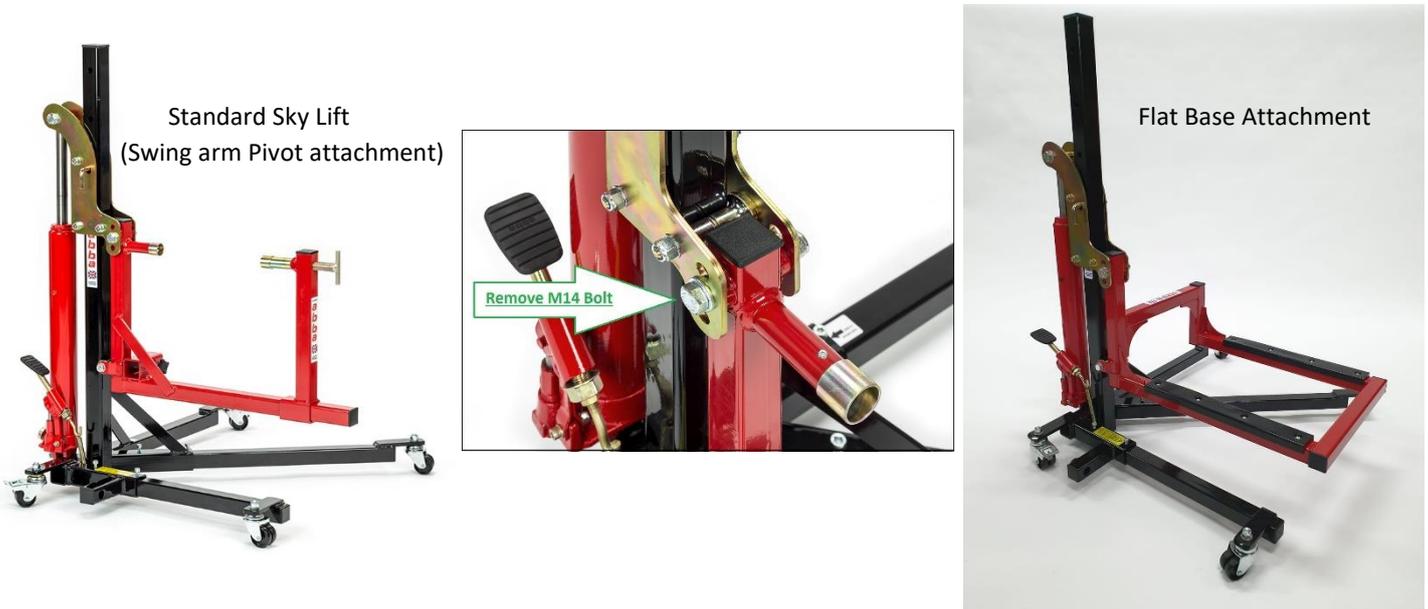

### Sky Flat Base Lift Operating Instructions:

Firstly decide on the exact lifting location by looking at the underside of the bike. The two lifting rails (covered by rubber) on the lift should come into contact with a fixed solid point, normally being the two lower frame rails of the bike. Please ensure that the lift is not touching any vulnerable parts of the bike. (Exhausts, side stand, brackets or bodywork etc)

Stand the bike up vertical (flick side stand up) and slide the Sky Lift under the bike ensuring the two lifting rails come into contact with your desired location. Ensure the valve is closed on the hydraulic pump and with the foot pedal raise the lift up to take the weight of the bike. When you have reached your desired height use the locking pin and lower lift onto pin.

When sliding the Sky Lift under the bike ensure the lift is pushed fully under the bike as far as possible, as show below, this will alleviate any excess leverage on the lift.



Correct Position – Lift pushed fully in.



Wrong Position: Lift too far out.

When lowering the bike ensure nothing will come into contact with the lift or bike **(Do not leave anything under lift!)** – Lower down slowly until the bike wheels touch the ground and slide lift out from under bike.

**Need help at any stage? Don't hesitate to contact us – 0044 (0)1245 322331 – [info@abbastands.co.uk](mailto:info@abbastands.co.uk)**